





This metal cabinet, article 1QB06, protects your video surveillance system (NVR, monitor, switch, power supply, etc.) from unauthorized access or theft.

The enclosure is stove-enamelled with a glossy finish (RAL9003, white), is made of steel with a thickness of 1mm and is equipped with a double lock (with different keys) and two tamper (switch) to detect opening and detachment from the wall. Thanks to a larger ventilation holes system an excellent air

circulation is guaranteed. Manage the devices is simple and practical thanks to the horizontal position of the tray. When space is not enough, choose this vertical installation is the best solution for applications where a typical rack (19" cabinet) cannot be used.

The cabinet is designed to offer the best heat dissipation. The air flow is optimized, through the holes from bottom to top, but can be forced using 2 kits of fans with temperature sensor (art. 1QB99, optional). The design of NVR supports offer the least possible resistance to air circulation.

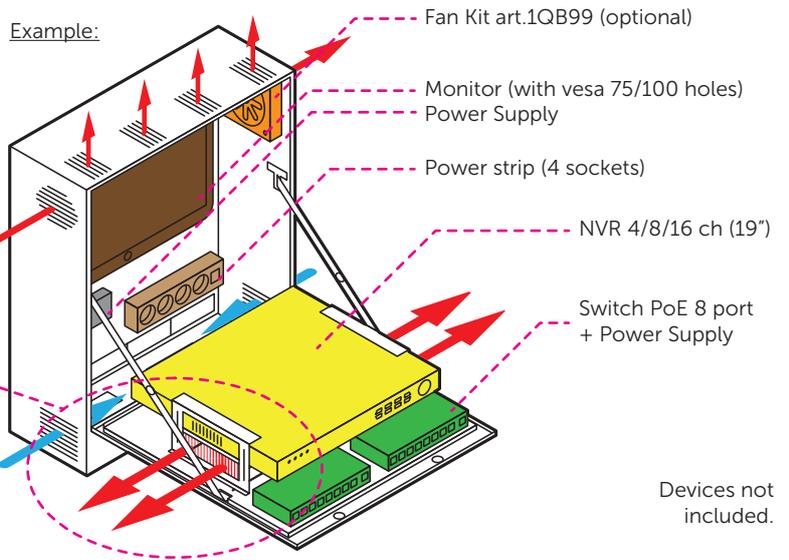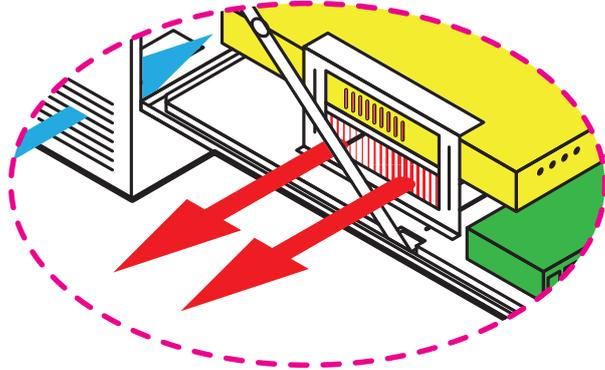

Devices not included.







2 Microswitch (included) and fan (optional)



Wall mount spacers (14mm) and detachment microswitch (included)

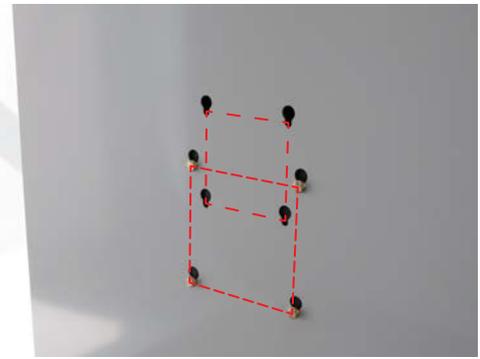

Holes for Vesa 75 or 100 monitor

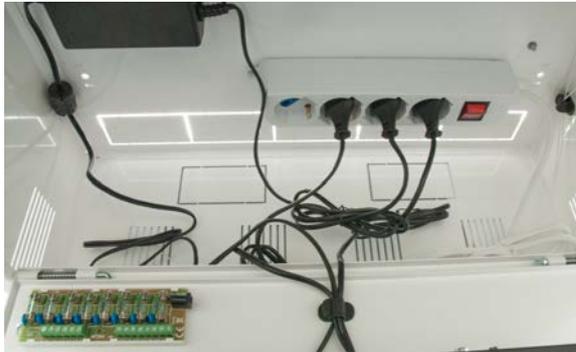

Useful space on the bottom for cable managing and optional accessories



Double lock (with different keys) and large ventilation holes for heat dissipation



Typical application (devices not included)

Article, Type		1QB06, "Security Box Pro, White"
Finishing		RAL9003 (white) stove-enamelled with a glossy finish
Passive security		Double lock (with different keys)
Active security		2 cabled microswitch (for lid and wall mount) 0,5A@50Vdc max (NC)
Operating environment	°C	-10 / +40 (Class II)
Passive dissipation		large ventilation holes (upper, lower and on the sides)
Active dissipation		2 fans with a temperature sensor, 220V with fuse (article 1QB99, optional)
Internal dimensions	mm (±5)	490 x 630 x 190 Useful space available: -NVR: 445 x 70 x 470, -On the Bottom: 520 x 90 x 620
External dimensions	mm	532 x 650 x 200(+14) (±5)
Weight	gr	15500
Enclosure		Sheet steel DC01 (thickness: 1mm) with corrosion protection
Typical application		Indoor (vertical), wall mount or semi-recessed
Packaging	n.	1 (brown neutral box)
Notes		RoHS compliant Wall spacers (14mm, included) Holes for monitor Vesa 75 or 100 and special brass screws (article MM500, optional). Kit of lathe screws (included) for power supplies, switches and power strip (optional)



Active kit for heat dissipation: fan with temperature sensor (2pcs max each enclosure) (article 1QB99, optional)



nr.4 Knurled Brass Screws (Vesa 75 or 100 monitors) (art. MM500, optional)



Incl.: 12 screws (brass), 5 Nuts + washers, 4 Dowels + screw



This metal cabinet, article 1QB05, ('small version') protects the heart of your security system.

The enclosure is stove-enamelled with a glossy finish (RAL9003, white), is made of steel with a thickness of 1mm and is equipped with a double lock (with different keys) and two tamper (switch) to detect opening and detachment from the wall.

Thanks to ventilation holes on the sides the heat dissipation is guaranteed.



Optimized NVR installation to improve heat dissipation.

Manage the devices is simple and practical thanks to the horizontal position of the tray.

When space is not enough, choose this vertical installation is the best solution for applications where a typical rack (19" cabinet) cannot be used.

Article		1QB05
Type		"Security Box Small Pro, White"
Finishing		RAL9003 (white) stove-enamelled with a glossy finish
Passive security		Double lock (with different keys)
Active security		2 cabled microswitch (for lid and wall mount) 0,5A@50Vdc max (NC)
Operating environment	°C	-10 / +40 (Class II)
Passive dissipation		Ventilation holes (lower and on the sides)
Internal dimensions	mm	385 x 495 x 110 (±2), (345 x 70 x 320 for NVR)
External dimensions	mm	435 x 500 x 121(+14) (±2)
Weight	gr	8700
Enclosure		Sheet steel DC01 (thickness: 1mm) with corrosion protection
Typical application		Indoor (vertical), wall mount
Packaging	n.	1 (brown neutral box)
Notes		RoHS compliant - Wall spacers (14mm, included)